



Product designation	Switch disconnecter		
Product type designation	GA		
Number of poles	nr.	3	
Operating voltage type		AC	
Electrical features			
Conventional free air thermal current I _{th}	A	63	
Rated insulation voltage U _i	V	1000	
Rated impulse withstand voltage U _{imp}	kV	8	
Operating current			
	AC21A 400V	A	63
	AC21A 500V	A	63
	AC21A 690V	A	63
	AC22A 400V	A	63
	AC22A 500V	A	63
	AC22A 690V	A	63
	AC23A 400V	A	63
	AC23A 500V	A	63
	AC23A 690V	A	47
Power dissipation per pole max	W	1.6	
Rated operational power AC23A			
	400V	kW	30
	690V	kW	45
Rated short time current (1s) I _{cw} (rms)	A	2500	
Conditional short-circuit current (rms)	kA	50	
Short circuit protection with fuse		gG63	
Making capacity AC23A 400V	A	1250	
Breaking capacity AC23A 400V	A	1000	
Operations			
Mechanical life	Cycles	30000	
Electrical life AC21A	Cycles	30000	
Ambient conditions			
Operating temperature			
	min	°C	-25
	max	°C	55
Storage temperature			
	min	°C	-40
	max	°C	70
Max altitude	m	3000	
Mechanical features			
Operating position			
	normal allowable	Vertical plan	
		Any	
Mounting		Screw / DIN rail	
		35mm	

Terminals

type		Pillar
width	mm	12.4
height	mm	10.4
screw		M8
tool		Metric Allen key 4

Tightening torque for terminals

min	Nm	5
max	Nm	6
min	lbft	3.75
max	lbft	4.5

Conductor section

min (IEC)	mm ²	4
max (IEC)	mm ²	70
min (AWG)		12
max (AWG)		1

Frontal IP degree

IP20

Pollution degree

3

UL technical data

Compliance

UL98 / CSA
C22.2 n°4

General purpose current rating

A 60

Operating voltage max

V 600

Horsepower/FLA current three phase motor

240V	20/54
480V	40/52
600V	40/41


Short circuit rating

kA 50


Short circuit rating with fuse

J/60

Dimensions

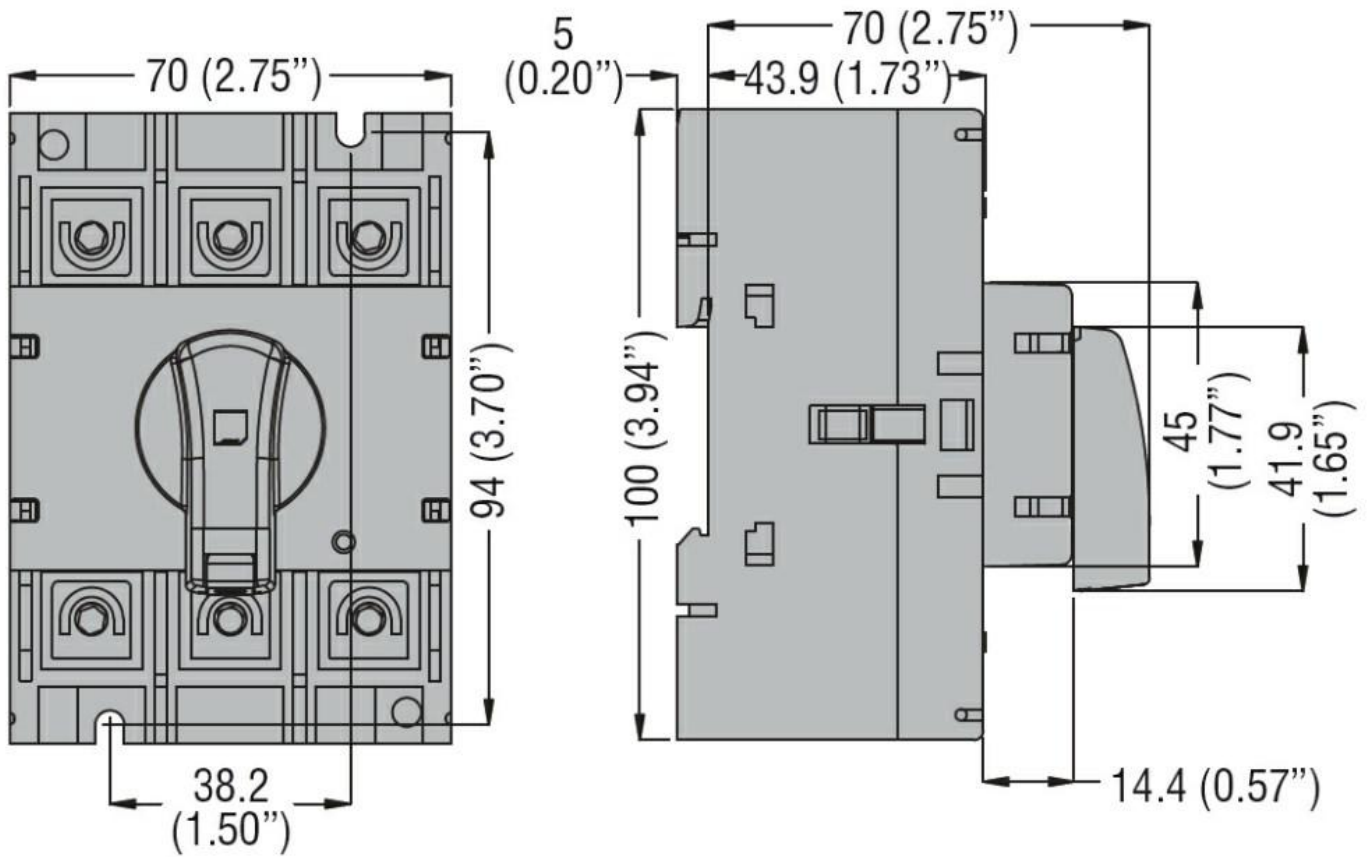

Wiring diagrams



Certifications and compliance

Compliance

- CSA C22.2 n°4
- IEC/EN 60947-1
- IEC/EN 60947-3
- UL98

Certifications

- CCC
- CSA C22.2 n°4
- cULus secondo UL98
- EAC