

DTI 6000 C | RECESSED COOLING UNITS

3000 - 6000 Btu/h



The New DTI 6000C series compact cooling units are easily serviceable and easy to install. These units also feature the best energy efficiency on the market when compared against similar product. These cooling units are ideal for mounting on a cabinet door and are partially recessed for space restricted installations.

NEW

Partially Recessed

For space restricted installations, ideal for door mount.

Thermal Overload Protection

Compressor and fan motors are outfitted with integral temperature switches to shut down the unit in the event of excessive temperature.

Pressure Overload Protection

High pressure cutout switch ensures safety by shutting off the compressor in the event of excessive pressure appearing in the refrigeration circuit.

Closed Loop Design

Designed to isolate the external ambient air from the internally conditioned air eliminating the risk of contaminants entering the cabinet.

Thermal Expansion Valve

Regulates the flow of refrigerant based on thermal demand for efficient performance over the entire operating temperature range.

Efficient Circulation

Large distance between intake and exhaust vents for efficient air circulation and elimination of hot spots.

Environmentally Friendly

Utilizes HFC-free R134a refrigerant versus a blended refrigerant for easier service and minimized negative impact to the environment.

Energy Efficient Hibernation Mode

When cooling isn't necessary due to equipment shutdown or cold weather conditions, the unit conserves energy by turning fans off - except for periodic cycling for circulating air within the enclosure.

High Airflow Backward Curve Impeller Fan

Provides high airflow in a long lasting, single bearing design. Outperforms typical two-bearing blowers with nearly twice the lifespan.

Phase Protection

Three-phase 400/460 VAC powered units are protected from phase mis-wiring.

ERP Efficiency Certified

As a component of the Kyoto Protocol to reduce carbon monoxide emissions, the European Energy Related Products (ERP) Directive includes an efficiency rating for fans. Pfannenberg proudly utilizes components which adhere to these requirements for up to 43% energy savings and operating costs reduction.

Maintenance Free, Filterless Design

The wide fin spacing is less susceptible to clogging from dirt buildup which can cause the unit to work harder and hamper efficiency.

External Display

For visual temperature monitoring.

Easy Installation and Maintenance

Tool-free spring plate design keeps the unit safely in place and allows mounting by 1 person in less than 3 minutes with 55% lower mounting costs. Direct access to the PCB and the fans means 80% shorter repair times.

Hermetically Sealed Compressor

The absence of any refrigerant fill valves eliminates leak paths. Recharging is never needed. 100% cooling capacity efficiency is ensured.

Active Condensate Management

Condensation is a natural by-product of refrigeration. The heated condensate collection pan boils this off thereby eliminating the need for drain tubes and buckets. To conserve power, this heater only activates when necessary.



DTI 6000 C Series (3000 - 6000 Btu/h) Recessed Cooling Units

Model Number	Part Number	Voltage (VAC)	Frequency (Hz)	Power Consumption (W)	Nominal (Run) Current @ 35A/35A °C	Fuse (maximum) Class CC	Noise Level (according to EN ISO 3741) dB(A)	Weight (without packaging) lb (kg)
DTI 6201C	13895221055	230	50/60	445 / 560	2.4 / 2.9	6	<62	88 (40)
	13895229055	400/460	50/60	480 / 570	1.8 / 2.1	10	<62	99 (45)
Design	Housing: galvanized sheet steel Cover: electrostatically powder coated RAL 7035 (light grey);							
DTI 6301C	13895321055	230	60	705 / 820	5 / 5.2	6	<62	88 (40)
	13895329055	400/460	50/60	770 / 820	3.5 / 3.3	10	<62	99 (45)
Design	Housing: galvanized sheet steel Cover: electrostatically powder coated RAL 7035 (light grey);							

Additional Data	DTI 6201C		DTI 6301C		
Ambient Temperature Range	+ 59 ... + 131 / + 15 ... + 55				°F / °C
Control range (adjustable)	SC	+ 77 ... + 113 / + 25 ... + 45; factory setting + 95 / + 35			
Refrigerant	type	R134a			
	quantity	580			g
Condensate management	integrated condensate evaporation system with safety overflow				
Protection system according to EN 60529	IP54	towards the electrical enclosure if used as intended by the manufacturer			
	IP34	towards the surroundings if used as intended by the manufacturer			
Accessories	Consult Factory				



For additional technical data, drawings and templates.
www.pfannenbergusa.com

Available Models:



DTI 6201C
Indoor Rated




DTI 6301C
Indoor Rated


Cooling Capacity Performance Curves

How to use these charts

Example: @ 95 °F (ambient, X-axis),
@ 95 °F (internal, diagonal lines)
DTI 6201C = 3400 Btu/h cooling capacity (Y-axis)
DTI 6301C = 5100 Btu/h cooling capacity (Y-axis)

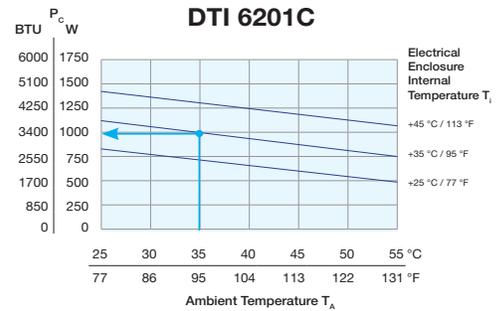

Note: Cooling capacity may vary between voltage and configurations.

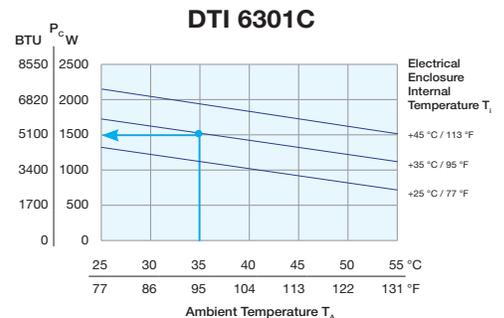

Note: Cooling capacity may vary between voltage and configurations.