

304 & 316 Stainless Steel EnviroLine® Series Junction Enclosures

Application -

Designed to house electrical controls, instruments and components in areas, which may be regularly hosed down or are in very wet or oily conditions. Provides a degree of protection from dust, dirt, oil, and water. For outdoor application a drip shield is recommended. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.063" stainless steel Type 304 & 316/316L.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Oil-resistant gasket.
- Standoffs provided for mounting optional panels.
- Removable hinge.
- Doors open 180 degrees.
- Black mini quarter turn latches.
- Latches are opened or closed with a screwdriver.
- Sealing washers and hole plugs included.
- Ground stud on door & body.
- Mounting feet included.
- Optional latches available.

Finish -

#4 brushed finish on all exterior surfaces. Optional sub-panels powder coated white.

IS6 - Industry Standards -

NEMA Type 3R, 4, 4X, 12 & Type 13
UL Listed Type 3R, 4, 4X & 12
CSA Type 3R, 4, 4X & 12
IEC 60529 IP66

***Special Instructions apply for IS3, IS4 and IS6 to maintain the environmental rating of Type 3R for these parts. See the Special Instructions on the Industry Standards page in the Technical Information Section.

304 STAINLESS STEEL ENVIROLINE® SERIES JUNCTION ENCLOSURES

ENCLOSURE PRODUCT CODE S6						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (E)	Panel Width (F)	List Price
SCE-604ELJSS	6.00	4.00	4.00	IS6	135.53	SCE-6P4	5.00	3.00	3.01
SCE-606ELJSS	6.00	6.00	4.00	IS6	169.40	SCE-6P6	5.00	5.00	3.61
SCE-806ELJSS	8.00	6.00	4.00	IS6	176.82	SCE-8P6	7.00	5.00	4.17
SCE-8066ELJSS	8.00	6.00	6.00	IS6	202.17	SCE-8P6	7.00	5.00	4.17
SCE-1008ELJSS	10.00	8.00	4.00	IS6	260.94	SCE-10P8	9.00	7.00	5.70
SCE-10086ELJSS	10.00	8.00	6.00	IS6	290.44	SCE-10P8	9.00	7.00	5.70
SCE-1210ELJSS	12.00	10.00	6.00	IS6	328.93	SCE-12P10	11.00	9.00	7.72
SCE-12108ELJSS	12.00	10.00	8.00	IS6	352.80	SCE-12P10	11.00	9.00	7.72
SCE-1212ELJSS	12.00	12.00	6.00	IS6	355.50	SCE-12P12	11.00	11.00	9.08
SCE-1412ELJSS	14.00	12.00	6.00	IS6	378.21	SCE-14P12	13.00	11.00	10.13
SCE-14128ELJSS	14.00	12.00	8.00	IS6	400.92	SCE-14P12	13.00	11.00	10.13
SCE-1614ELJSS	16.00	14.00	6.00	IS6	444.87	SCE-16P14	15.00	13.00	19.95
SCE-16148ELJSS	16.00	14.00	8.00	IS6	508.38	SCE-16P14	15.00	13.00	19.95

316 STAINLESS STEEL ENVIROLINE® SERIES JUNCTION ENCLOSURES


ENCLOSURE PRODUCT CODE S7						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (E)	Panel Width (F)	List Price
SCE-604ELJSS6	6.00	4.00	4.00	IS6	162.64	SCE-6P4	5.00	3.00	3.01
SCE-606ELJSS6	6.00	6.00	4.00	IS6	203.28	SCE-6P6	5.00	5.00	3.61
SCE-806ELJSS6	8.00	6.00	4.00	IS6	212.18	SCE-8P6	7.00	5.00	4.17
SCE-8066ELJSS6	8.00	6.00	6.00	IS6	242.60	SCE-8P6	7.00	5.00	4.17
SCE-1008ELJSS6	10.00	8.00	4.00	IS6	313.13	SCE-10P8	9.00	7.00	5.70
SCE-10086ELJSS6	10.00	8.00	6.00	IS6	348.53	SCE-10P8	9.00	7.00	5.70
SCE-1210ELJSS6	12.00	10.00	6.00	IS6	394.72	SCE-12P10	11.00	9.00	7.72
SCE-12108ELJSS6	12.00	10.00	8.00	IS6	423.36	SCE-12P10	11.00	9.00	7.72
SCE-1212ELJSS6	12.00	12.00	6.00	IS6	426.60	SCE-12P12	11.00	11.00	9.08
SCE-1412ELJSS6	14.00	12.00	6.00	IS6	453.85	SCE-14P12	13.00	11.00	10.13
SCE-14128ELJSS6	14.00	12.00	8.00	IS6	481.10	SCE-14P12	13.00	11.00	10.13
SCE-1614ELJSS6	16.00	14.00	6.00	IS6	533.84	SCE-16P14	15.00	13.00	19.95
SCE-16148ELJSS6	16.00	14.00	8.00	IS6	610.06	SCE-16P14	15.00	13.00	19.95



Phone (989) 799-6871
Fax (989) 799-4524



STAINLESS STEEL ENVIROLINE® SERIES JUNCTION ENCLOSURES TECHNICAL DATA

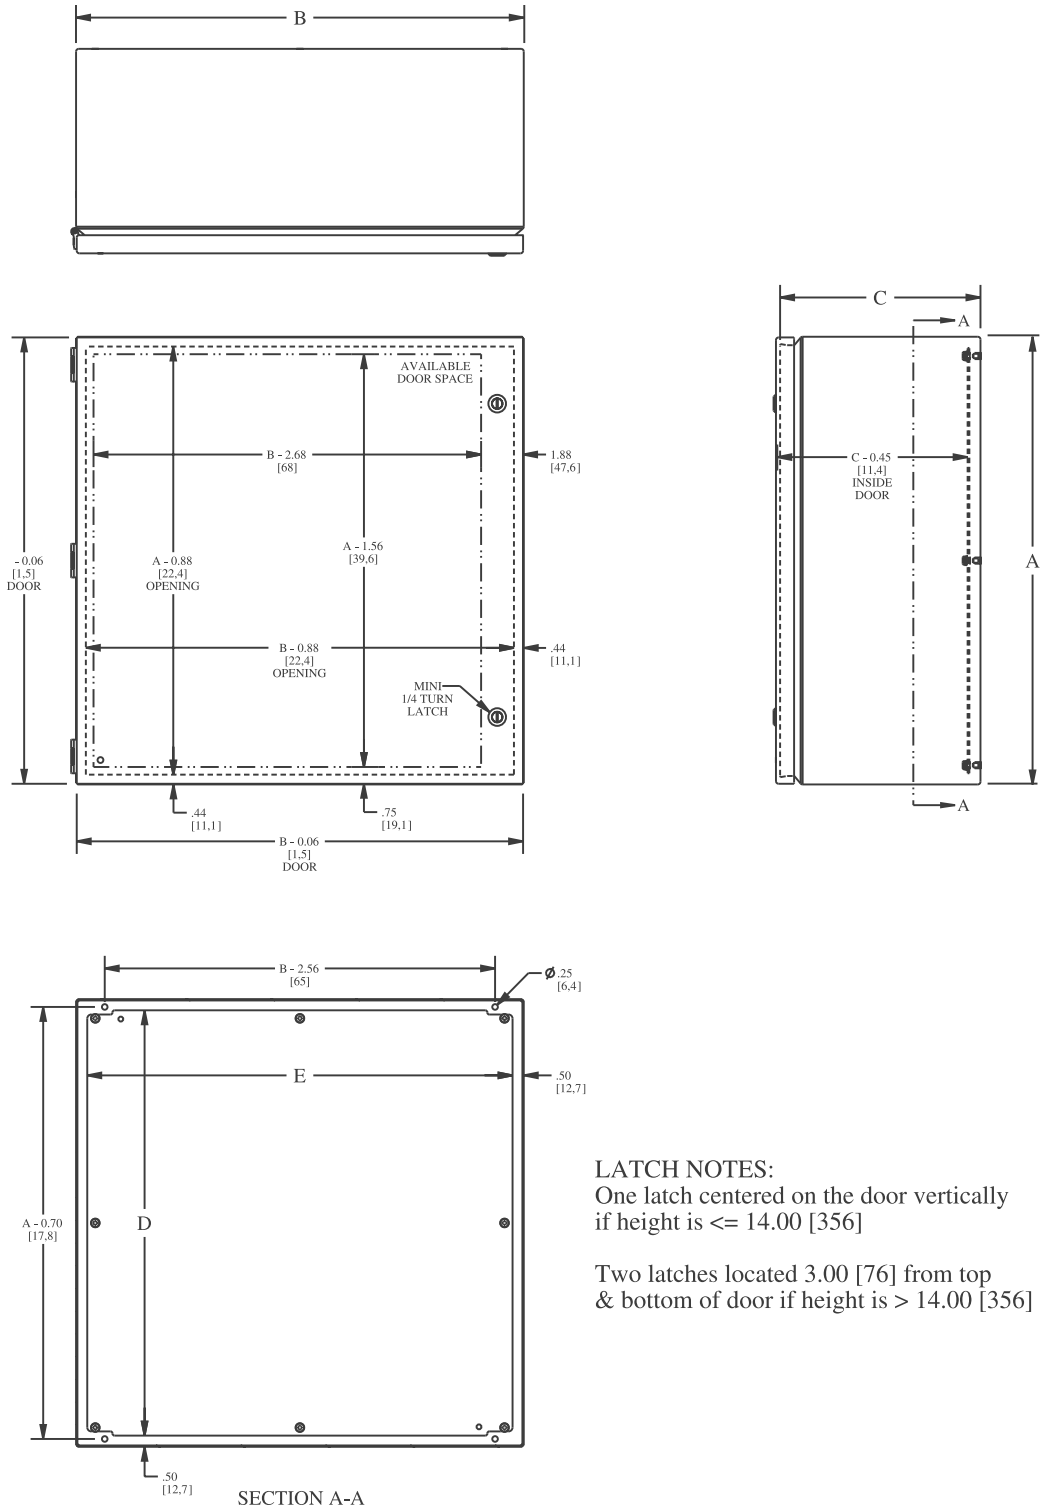

LATCH NOTES:
 One latch centered on the door vertically if height is ≤ 14.00 [356]
 Two latches located 3.00 [76] from top & bottom of door if height is > 14.00 [356]