

# PWS 3202 | AIR/WATER HEAT EXCHANGERS

7165 Btu/h

The PWS 3202 Advantage Series Air/Water Heat Exchangers offer over 7000 Btu/h cooling capacity and are ideal for harsh ambient conditions. Requiring only a cool liquid source and power. Available with either powder coated or stainless steel covers. [Need a cool liquid source?](#) Pair this unit with one of our packaged chillers.

## Washdown Roof Design

Metal covers are designed with a sloped top which sheds water away from the electrical enclosure as well as eliminates potential water pooling, corrosion and ice buildup.

## Optimized Internal Design

Smart engineered solution, easy to service and maintain.

## Rugged Design

Powder coated steel or stainless steel cover designed for manufacturing environments. Easily painted to match enclosure or machine.

## Long Airflow Path

Heat exchangers are designed to draw hot air from the top of the enclosure and deliver cool air below the components.

## Closed Loop Design

Designed to isolate the external ambient air from the internal air circuit eliminating the risk of contaminants entering the cabinet.

51.89 in. (1318 mm)

15.76 in. (400 mm)

9.07 in. (230 mm)

## Push to Connect Fittings

Hydronic connectors that supports quick connection to 1/2 inch O.D. hose or 1/2 inch I.D. hose with included adapter. Unlike other units that have rigid permanent connections.

## Lifting Handles

Handles are mounted on the cover for easy handling and installation.

## Intelligent Control of Water Flow

The adjustable electronic thermostat permits precise control of the electrical enclosure temperature by regulating the coolant flow which is activated by a solenoid valve. This regulates the coolant flow to minimize coolant waste and increase energy-efficiency.

## Condensation Management

Physical barriers allow for condensation to be collected and drained from the system with zero intrusion into the cabinet.



**PWS 3202 Series 7165 Btu/h (2100 W) Air to Water Heat Exchangers**


Model Number	Part Number <small>RAL 7035 (Light Grey)</small>	Voltage (VAC)	Frequency (Hz)	Power Consumption (W)	Nominal (Run) Current (A)	Fuse (maximum)	Fluid Connection	Noise Level (according to EN ISO 3741) dB(A)	Dry Weight (without packaging) lb (kg)
<b>PWS 3202</b> Indoor/Outdoor Rated (NEMA Type 12/3R/4)	12358310045	115	60	77.6	0.694	6	1/2" push in fitting	<62	62 (28)
	12358320045	230	50/60	66.2	0.312	6	1/2" push in fitting	<62	62 (28)
<b>Design</b>	<b>Housing:</b> galvanized sheet steel <b>Cover:</b> galvanized/electrostatically powder coated (200 °C)								
<b>PWS 3202 SS</b> Indoor/Outdoor Rated (NEMA Type 12/3R/4/4x)	12358310048	115	60	77.6	0.694	6	1/2" push in fitting	<62	62 (28)
	12358320048	230	50/60	66.2	0.312	6	1/2" push in fitting	<62	62 (28)
<b>Design</b>	<b>Housing:</b> stainless steel 304 <b>Cover:</b> stainless steel 304								

Additional Data		PWS 3202	PWS 3202 SS	
Control range (adjustable)	SC	+ 50 ... + 104 / + 10 ... + 45; factory setting + 95 / + 35		°F / °C
Rated flow rate		2 (450)		gpm (L/H)
Maximum water pressure	PSIG	145 (10)		PSIG (BAR)
NEMA Type rating		12/3R/4/4x		against enclosure when properly installed



For additional technical data, drawings and manuals.  
[www.pfannenbergusa.com](http://www.pfannenbergusa.com)

**Available Models:**

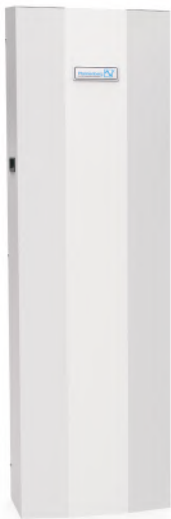

**Light Grey**  
Indoor/Outdoor Rated  
(NEMA Type 12/3R/4/4x)



**Stainless Steel**  
Indoor/Outdoor Rated  
(NEMA Type 12/3R/4/4x)

**Cooling Capacity Performance Curve**

**How to use this chart**

Example: @ 95 °F (ambient, X-axis), @ 95 °F (internal, diagonal lines)  
= 7165 Btu/h cooling capacity (Y-axis)

