

304 & 316 Stainless Steel Continuous Hinge Enclosures

Application -

Designed for use as electrical junction boxes, terminal wiring boxes, instrument housings, and electrical control enclosures. For use in wet and hosed down areas and in corrosive atmospheres. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction -

- 0.063" stainless steel Type 304 & 316/316L.
- Seams continuously welded and ground smooth.
- Stainless steel continuous hinge.
- Stainless steel external screw clamps are quick and easy to operate.
- Oil-resistant door gasket.
- Ground stud on door and body.
- Standoffs provided for mounting optional sub-panels.
- Welded mounting provision top and bottom of back.

Finish -

#4 brushed finish on all exterior surfaces. Optional sub-panels powder coated white.

IS6 - Industry Standards -

NEMA Type 3R, 4, 4X, 12 & Type 13
UL Listed Type 3R, 4, 4X & 12
CSA Type 3R, 4, 4X & 12
IEC 60529 IP66

***Special Instructions apply for IS3, IS4 and IS6 to maintain the environmental rating of Type 3R for these parts. See the Special Instructions on the Industry Standards page in the Technical Information Section.



304 STAINLESS STEEL CONTINUOUS HINGE ENCLOSURES

ENCLOSURE PRODUCT CODE S1						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (E)	Panel Width (F)	List Price
SCE-6044CHNFSS	6.13	4.00	4.00	IS6	176.45	SCE-6P4	5.00	3.00	3.01
SCE-606CHNFSS	6.13	6.00	4.00	IS6	220.89	SCE-6P6	5.00	5.00	3.61
SCE-8064CHNFSS	8.13	6.00	4.00	IS6	229.90	SCE-8P6	7.00	5.00	4.17
SCE-1008CHNFSS	10.13	8.00	4.00	IS6	332.84	SCE-10P8	9.00	7.00	5.70
SCE-10086CHNFSS	10.13	8.00	6.00	IS6	364.04	SCE-10P8	9.00	7.00	5.70
SCE-12106CHNFSS	12.13	10.00	6.00	IS6	411.42	SCE-12P10	11.00	9.00	7.72
SCE-12108CHNFSS	12.13	10.00	8.00	IS6	438.43	SCE-12P10	11.00	9.00	7.72
SCE-1212CHNFSS	12.13	12.00	6.00	IS6	440.78	SCE-12P12	11.00	11.00	9.08
SCE-1412CHNFSS	14.13	12.00	6.00	IS6	465.15	SCE-14P12	13.00	11.00	10.13
SCE-1614CHNFSS	16.13	14.00	6.00	IS6	548.38	SCE-16P14	15.00	13.00	19.95
SCE-16148CHNFSS	16.13	14.00	8.00	IS6	608.14	SCE-16P14	15.00	13.00	19.95

316 STAINLESS STEEL CONTINUOUS HINGE ENCLOSURES




ENCLOSURE PRODUCT CODE S7						SUB-PANEL (P3)			
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	List Price	Catalog No.	Panel Height (E)	Panel Width (F)	List Price
SCE-6044CHNFSS6	6.13	4.00	4.00	IS6	211.74	SCE-6P4	5.00	3.00	3.01
SCE-606CHNFSS6	6.13	6.00	4.00	IS6	241.06	SCE-6P6	5.00	5.00	3.61
SCE-8064CHNFSS6	8.13	6.00	4.00	IS6	263.88	SCE-8P6	7.00	5.00	4.17
SCE-1008CHNFSS6	10.13	8.00	4.00	IS6	389.42	SCE-10P8	9.00	7.00	5.70
SCE-10086CHNFSS6	10.13	8.00	6.00	IS6	425.88	SCE-10P8	9.00	7.00	5.70
SCE-12106CHNFSS6	12.13	10.00	6.00	IS6	457.71	SCE-12P10	11.00	9.00	7.72
SCE-12108CHNFSS6	12.13	10.00	8.00	IS6	526.12	SCE-12P10	11.00	9.00	7.72
SCE-1212CHNFSS6	12.13	12.00	6.00	IS6	504.94	SCE-12P12	11.00	11.00	9.08
SCE-1412CHNFSS6	14.13	12.00	6.00	IS6	552.19	SCE-14P12	13.00	11.00	10.13
SCE-1614CHNFSS6	16.13	14.00	6.00	IS6	658.05	SCE-16P14	15.00	13.00	19.95
SCE-16148CHNFSS6	16.13	14.00	8.00	IS6	680.46	SCE-16P14	15.00	13.00	19.95

Phone (989) 799-6871
Fax (989) 799-4524



STAINLESS STEEL CONTINUOUS HINGE ENCLOSURES

TECHNICAL DATA

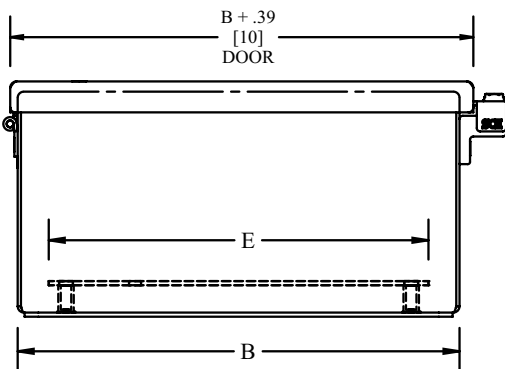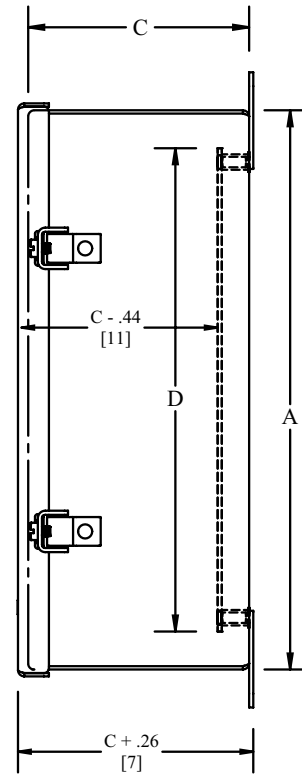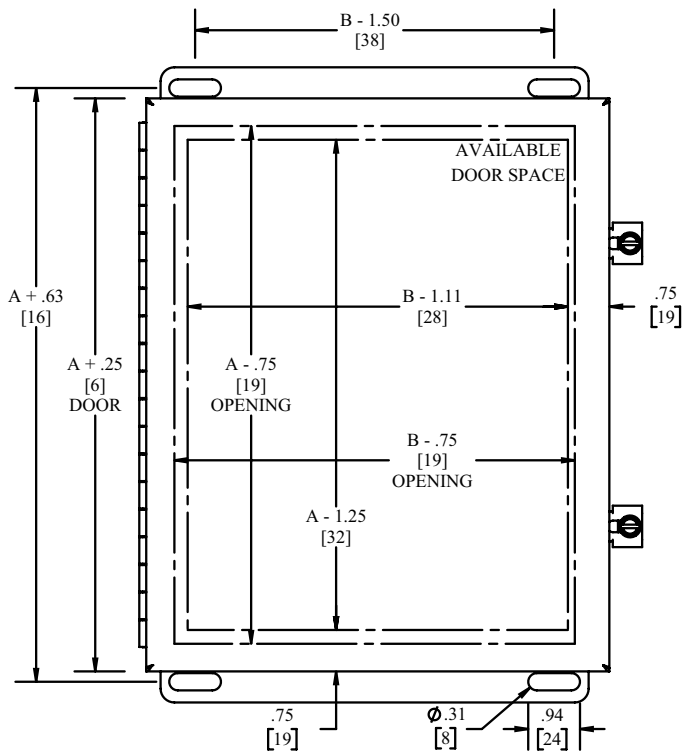

NOTE:

SUB-PANEL MUST BE ORDERED SEPARATELY.

CLAMPING NOTE:

ENCLOSURES < 10.00 [254] IN HEIGHT REQUIRE ONE CLAMP CENTERED VERTICALLY ON DOOR.